Lecture on Sensor Networks

Copyright (c) 2005 Dr. Thomas Haenselmann (University of Mannheim, Germany).
Permission is granted to copy, distribute and/or modify this document
under the terms of the GNU Free Documentation License, Version 1.2
or any later version published by the Free Software Foundation;
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts.
A copy of the license is included on the last pages entitled "GNU
Free Documentation License".

time

©Thomas Haenselmann – Department of Com
Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: Cyclic Redundancy Check (CRC)

CRC is based on the idea of polynomial division. Remember:

$(x^5 + x^3 + x + 1) : (x + 1) = x^4 - x^3 + 2x^2 - 2x + 3 - 2/(x+1)$

$-(x^5 + x^4)$

$0 \quad - x^4 + x^3$

$-(-x^4 - x^3)$

$0 + 2x^3 + \quad + x$

$-(2x^3 + 2x^2)$

$0 - 2x^2 + x$

$-(-2x^2 - 2x)$

$0 \quad 3x + 1$

$-(3x + 3)$

$0 - 2 = \text{Remainder or modulus}$

Check:

$[x^4 - x^3 + 2x^2 - 2x + 3 - 2/(x+1)] * (x+1) = \ldots$

What's the difference between polynomial division and normal division?

-> There is no carry-over. Coefficients of a term x^n are only combined with coefficients of another term x^n.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: Cyclic Redundancy Check

A bit string is interpreted as a polynomial by numbering the bits consecutively and, if a bit is set, by adding the corresponding term of the polynomial. Example:

```
76543210  position
11010110  data bits
```

$x^7+x^6+x^4+x^2+x$ the polynomial corresponding to the given data bits

The principle of CRC: Sender and recipient agree upon a „divisor polynomial“, also called generator polynomial. Then, g zeros are added to the message, g being the degree of the generator polynomial. In the next step the sender divides the message (extended by g zeros), similar to polynomial division. In most cases there'll be a remainder, the result of the division is of no interest. The remainder is then subtracted from the message extended by the zeros. The resulting bit string is now transferred to the recipient. If the message was transmitted correctly, then no remainder should emerge on the recipient's side. Why? Because the sender intentionally subtracted the remainder before sending the message. The g zeros which emerge during the division are interpreted by the recipient as an indication of an error free transmission and aren't processed any further (in particular the zeros are not data bits!)

Note: The sender can safely subtract the remainder without harming the message. Why?

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Error control: Cyclic Redundancy Check

The only difference to normal polynomial division: Calculations are binary and after the calculation of each digit a modulo 2 operation is performed! In other words: Always ignore the carry-over. This simplifies the addition and subtraction significantly.

```
 10101101     01001110
+01011100    -11101010
---------    ---------
 11110001     10100100
```

Discovery: Both operations, plus and minus, are equivalent to the XOR.

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: Cyclic Redundancy Check (CRC)

Example:

```
Message:          1101011011
Generator polynomial: 10011 (x^4+x+1) = 4th degree (5th order)
Message extended by 4 zeros:  11010110110000

Division:11010110110000:10011= (the result doesn't matter)
     XOR 10011
        ------
         010011
     XOR -10011
         ------
              010110
          XOR -10011
              ------
              00010100
             XOR 10011
                 001110 = remainder

  11010110110000
minus (XOR) 1110
  11010110111110 =
```

transmitted message, which should generate no remainder when divided

Special note: The division continues, if the MSB (most significant bit) of the divisor and of the bit string currently being divided is set. Sometimes the bit string has to be extended by new bits (from the message) until the generator polynomial "fits under it".

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: (CRC) – Recognized errors

Which errors are being recognized?

For the following analysis separate the error from the message:

Transmitted message including an error (or the corresponding polynomial) : M(x)
Original message (error free) : T(x)

Separate the transmitted message in: M(x) = T(x)+E(x)

with E(x) representing the isolated error. Every bit which is set in E stands for a toggled bit in M. A sequence from the first set bit to the last is called a burst-error. A burst-error can occur anywhere in E.

Question: Is the following calculation divided by the generator polynomail G(x) without a remainder? If so, then we can't detect the error.

`[T(x)+E(x)]:G(x) = „remainder-less“?`

T(x):G(x) is divisible without any remainder, because we constructed the message exactly for this purpose. So, the analysis is reduced to the question whether E(x):G(x) erroneously results in no remainder.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: (CRC) – Recognised errors

Which errors are recognized?

1-bit errors:

The burst consists of only one error. If the generator polynomial has more than one coefficient, E(x) with a leading 1 followed by zeros cannot be divided without a remainder.

Example:

```
 1000(...)0:101=1
-101
 ---
 001 ... continued as above...
```

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: (CRC) – Recognised errors

Which errors are recognized?

2-bit error:

A 2-bit error must look like this: $x^i+(...)+x^j$, so x^j can be factored out.
This results in $x^j(x^{(i-j)}+1)$.

It has already been proven that a generator polynomial with more than one term can't divide the factor x^j. When is a term (x^k+1) divided? (with k=i-j)

For a given generator polynomial this has to be tested for 2-bit bursts with different lengths. Here, the error has (inevitably) always the form 10(...)01.

What follows is an example program to test whether the generator polynomial

$\mathbf{x^{15}+x^{14}+1}$

is useful regarding 2 bit errors.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: (CRC) – Recognized errors

Which errors are recognized?

```
main()
{
  char* generator = "1100000000000001";
  char* bit_string;

  for(int length = 2; length < 60000; length++) {

    if((length % 100) == 0) cout << length << endl;
    bit_string = new char[length+1];

    for(int j = 1; j < length-1; j++) // clear bitstring
      bit_string[j] = '0';

    bit_string[0] = '1'; bit_string[length-1] = '1'; bit_string[length] = 0;

    // test if divisible by generator polynomial
    if(Divisible(bit_string, length, generator, strlen(generator)) == true) {
      cout << "Division successful with length " << length << endl;
      break;
    } // if

    delete[] bit_string; bit_string = NULL;
  } // for

  if(bit_string) delete[] bit_string;
} // main
```

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: (CRC) – Recognized errors

Which errors are recognized?

Error polynomials with an odd number of terms:

Speculation: If the generator polynomial contains the term (x^1+x^0), an error string with an odd number of bits can't be divided.

Proof by contradiction: Assuming E(x) being divisible by (x^1+x^0), the factor can also be extracted:

$$E(x) = (x^1+x^0)Q(x)$$

So far we only divided polynomials. Now we use it as a function and evaluate it for x=1.

(x^1+x^0) equals $(1+1)$ and $Q(x)$ equals 1, because $Q(x)$ still contains an odd number of terms (additions are still done modulo 2). Hence follows $(1+1)Q(x)=0x1=0$

But in the beginning we assumed that $E(x)$ contains an odd number of terms. So the result should have been 1, not 0. As follows, the factor (x^1+x^0) can't be extracted. As a consequence $E(x)$ isn't divisible by (x^1+x^0), if it contains an odd number of terms (or error bits).
Result: The generator polynomial should contain the term (x^1+x^0) to catch all errors with an odd number of bits.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Error control: (CRC) – Recognized errors

Which errors are recognized?

Recognition of burst errors of length r:

The burst error in E(x) could look like this: `0001 anything 100000`

To move the last bit to the right, a factor can be factored out:

$E(x)=x^i(x^{(r-1)}+ ... + 1)$

with i being the number of zeros right of the last 1.

If the degree of the generator polynomial itself is r (so it has r+1 terms), the factor $(x^{(r-1)}+ ... + 1)$ also cannot be divided, because the generator polynomial is larger than the number to be divided.

Example (decimal system): 99:1234567 isn't divisible without a remainder (result 0, remainder 99). Detecting burst errors with length r is trivial in the way that the error itself simply occurs at the end of the division.

Even if the burst is just as large as the generator polynomial, the division yields a remainder only if by chance the error coincides exactly with the generator polynomial. This is possible, but not very likely.

Example (decimal system): 1234567:1234567=1 (modulo 0)

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA

Idea: Everybody may transmit whenever desired, but only a frame of max. length. Other participants who are already sending aren't regarded.

Collision:

If two frames overlap, both of them are considered as destroyed. But both participants can detect that there was a collision and send their message (frame) once again. Of course both frames would collide again, so there would never be a valid transmission.

Solution:

Every sender waits for a random amount of time before starting its transmission (in the case of sensor nodes this time could be „overslept" to save on energy). The solution to the collision problem is that the participant with the shorter delay has (hopefuly) already finished its transmission before the one with the longer delay starts to send. In the worst case a repeated collision will happen and the process has to be repeated.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA

The frame can collide on both ends:

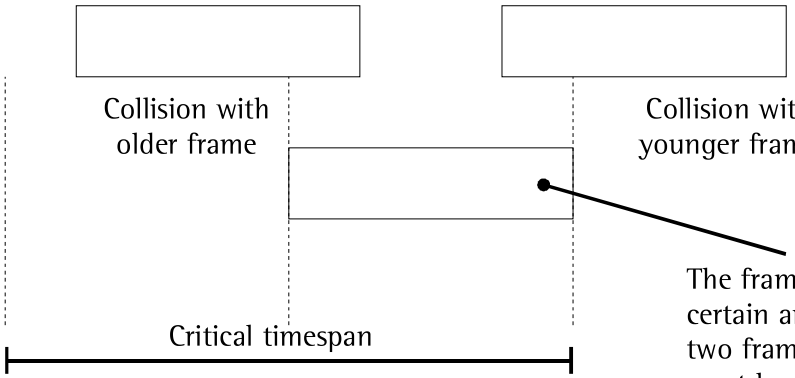

The frame of a sender has to be „left alone“ for a certain amount of time, which is at least as long as two frames. During this timespan no other sender must become active.

Event of „special recklessness*“. If the second (gray) sender listened, it could avoid the collision and would not harm its own packet and the first sender's packet.

*rücksichtslos

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA: Analytical review

Arrival rate λ

Average number of attempts to access the channel. If there are n stations each of which produces an individual arrival rate g, the overall rate $\lambda = ng$.

Transmission rate S

Number of frames that actually reach their destination.
S = 0: no frame reaches its destination because...

a) no frames are sent
b) so many frames are sent that all of them collide

S = 1: every frame can be transmitted without collision,
e. g. because there's only one sender

P_S

Probability that frames are transmitted successfully

$S = \lambda P_S$

Apparently there are two extremes:

a) The senders create hardly any arrivals (λ=0). This result in good conditions for the transmission, because the medium is always free (P=1), but it is also not used.
b) The senders create many arrivals (λ large). This results in continuous collisions (P=0), so nothing is transmitted without collision. The optimum lies in between.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA: The Poisson distribution

λ is the arrival rate per time unit. The probability for n arrivals per time unit is calculated like this:

$$P_\lambda(n) = \frac{\lambda^n}{n!} e^{-\lambda}$$

λ = number of arrivals per time interval
$1/\lambda$ = mean time between two consecutive arrivals

n = number of arrivals, for which we want to obtain the probability P(n)

Which n will yield the highest probability?

Remark: The use of the Poission distribution requires an exponential distribution of the time of arrival in between two consecutive events. In most cases of mutually independent results and a large number of participants this can be assumed.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA: Analytical review

Example: We know that a department in a store registers an average number of two arrivals of customers per minute during lunchtime. What are the probabilities for 0, 1, 2 etc. customers, resp. that at least 0, 1, 2, etc. customers arrive?

$\lambda = 2$, n=0,1,2, ...

n	P(n)	Sum	
0	0,135	0	0,135
1	0,271	0	0,406
2	0,271	0	0,677
3	0,180	0	0,857
4	0,090	0	0,947
5	0,036	0	0,983
6	0,012	0	0,995
7	0,003	0	0,998

One salesperson has nothing to do with a P' of 13%.

With P'=40%, one salesperson is enough for customer care.

With W'=59% there's a need for at most 2 salesperson.

In 32% of the cases at least a third salesperson would be necessary.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure Aloha: Analytical review

As seen before a successfully transmitted packet needs at least two frames. In other words there have to be exactly 0 arrivals of other packets during two periods.

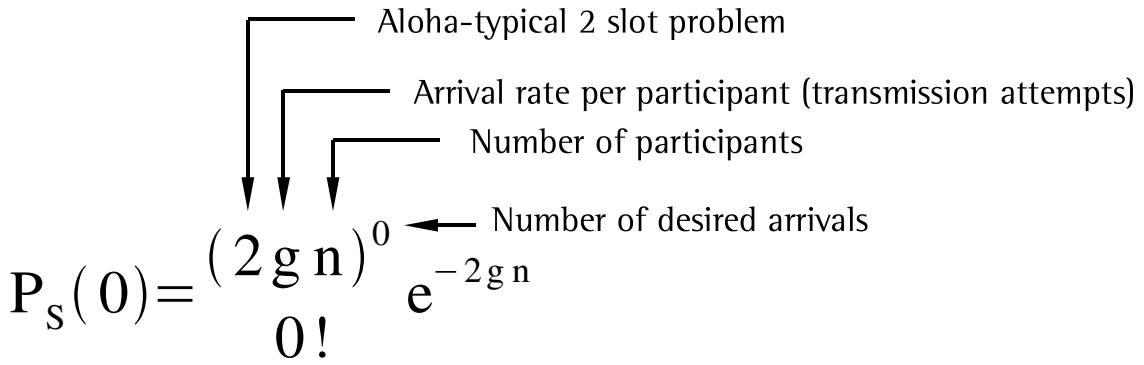

How does the probability P_S of the chance to send successfully vary with the number of participants?

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA: Analytical review

Packet throughput of pure Aloha

On the last page we calculated the probability of the channel being idle, when there's an certain average number of packets to be sent (the arrival rate).

In fact, the achievable data throughput L (having n participants with a transmission rate of g packets per frame length and participant) is more interesting.

Arrival rate (in packets per frame length) on the channel

$$L(n,g) = g\,n\,\frac{(2gn)^0}{0!}\,e^{-2gn}$$

Probability of success

What's the maximum packet throughput achievable with classic ALOHA?

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Pure ALOHA: Analytical review

Probability of successful transmission on the k^{th} attempt to send:

$$P(k=K)=(1-P_S)^{k-1}P_S$$

$(1-P_S)^{k-1}$: k-1 attempts failed

P_S: One try succeeded

Average time to deliver one packet:

$$D=\sum_{k=1}^{\infty} k(1-P_S)^{k-1}P_S$$

$(1-P_S)^{k-1}$: Despite the (k-1) waiting periods the transmission isn't safe at attempt number k (Why? Because for the other cases of k there must be some „probability left").

P_S: If the packet is sent after exactly k frames, it has been waiting (k-1) times before.

k: Of course, if k frames are necessary to transmit the packet, they have to pass, but only with the following probability

$\sum_{k=1}^{\infty}$: For the sender a different number k of frames could occur. The packet can't be transmitted faster than after a full frame length. In this case no waiting period would have occurred.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Energy efficiency of pure Aloha

Because the medium is always monitored in Aloha whenever there's nothing to send, the energy consumption alternates only between P_{TX} and P_{RX}.

P_{RX} Energy consumption during reception

P_{TX} Energy consumption during transmission

Rate only created by the sender

$$b_1 = 1 - \frac{(1g)^0}{0!} e^{-1g}$$

The sender itself produces 0 arrivals (is idle)

Complementary case, which means the sender is busy

$$P_{ower}^{PA} = b_1 P_{TX} + (1 - b_1) P_{RX}$$

Transmission energy

Reception energy
Remark.: This includes inefficient idle-listening, too.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Energy efficiency of classic Aloha

Example

$P_{\text{base consumption}}$ = 8 mA
P_{TX} = 20 mA
P_{RX} = 6 mA

$$b_1 = 1 - \frac{(1g)^0}{0!} e^{-1g}$$

$$P^{PA} = b_1 P_{TX} + (1 - b_1) P_{RX}$$

A frame length is 10ms, i. e. 100 frames/second.
Nodes will send once per second.

g=0,01 => b_1 = ~(1-0,99) = 0,01

P^{RA} = 0,01x20 + (1-0,01)x6 + 8 = ~14,14 mA

Battery with 2000 mAh will last for 2000x60x60/14,14 = ~509193s = ~141 hours

Result: For hardly 6 days no sensor nodes can be scattered into a field.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Example for medium access control (MAC) protocols:

Pure aloha for sensor networks?

+ Sender can send at anytime. In particular it doesn't have to be „awake" before (at least not prior to sending). Instead, it sends whenever there's a need.

+ If the transmission failed, the randomly determined waiting period has to pass. During this waiting period the node can switch to energy saving mode.

- The node would basically always have to listen, when a message is expected. Especially in the field of long-distance routing it is uncertain in advance when a message has to be received and forwarded. That is because in this case the node isn't the initiator but the „service provider".

Permanent readiness to receive is not an option for sensor nodes.
The problem has to be solved more energy efficiently.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Classic medium access control (MAC) protocols for sensor nodes?

Simulation of MAC-protocols

```
const long MAX_TIME             = 10000L;
const long NO_STATIONS          = 100L;
const long FRAME_LENGTH         = 100L;
      long medium_occupied_till = -1;
      long survival_timer       = -1;
      long successful_packets   = 0;
      long no_frames            = MAX_TIME / FRAME_LENGTH;

class Station
{
public:
  void Init() {};
  void TriggerSend(long);
}; // class Station

void Station::TriggerSend(long current_time)
{
  if(current_time < medium_occupied_till) {
    survival_timer = -1;
  } // if
  else survival_timer = 0;

  medium_occupied_till = current_time + FRAME_LENGTH;
} // Station::TriggerSend
```

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Classic medium access control (MAC) protocols for sensor nodes?

Simulation of different MAC-protocols

```
main()
{
  Station* station          = new Station[NO_STATIONS];

  for(long i = 0; i < NO_STATIONS; i++)
    station[i].Init();
  for(long arrival_rate = 0; arrival_rate < 400; arrival_rate += 1) {
    medium_occupied_till = -1; survival_timer = -1; successful_packets = 0;
    for(long time = 0; time < MAX_TIME; time++) {
      for(long station_index = 0; station_index < NO_STATIONS; station_index++)
        if((abs(rand()) % (100*NO_STATIONS*FRAME_LENGTH)) < arrival_rate)
          station[station_index].TriggerSend(time);

      if(survival_timer != -1) survival_timer++;
      if(survival_timer == FRAME_LENGTH) {
        successful_packets++;
        survival_timer = -1;
      } // if
    } // for

    double overall_arrival_rate = ((double)arrival_rate)/100.0;
    cout << overall_arrival_rate << " "
         << successful_packets/(double)no_frames << endl;
  } // for

  delete[] station;
} // main
```

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

Cyclic Redundancy Check

CRC analysis

Aloha for sensor networks

Energy efficiency of Aloha

Simulation

Classic medium access control (MAC) protocols for sensor nodes?

Simulation of different MAC-protocols

After the analytic view the Aloha approach is now to be simulated using the program on the previous page.

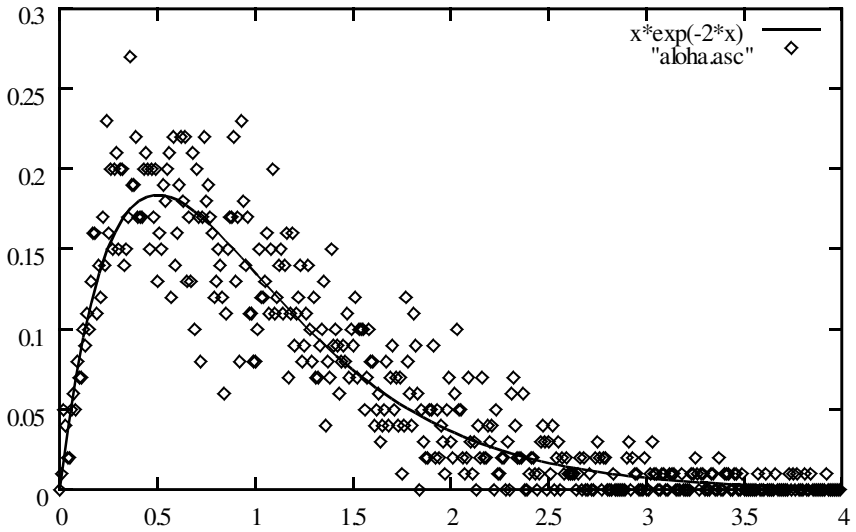

With 100 stations, 100 frames, each divided into 100 simulation time units the distribution fairly adapts to the curve. Why do in practice higher or lower data throughputs still occur in some simulation runs?

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

GNU Free Documentation License
Version 1.2, November 2002

Copyright (C) 2000,2001,2002 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

©Thomas Haenselmann – Department of Com
Science IV – University of Mannheim

A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
D. Preserve all the copyright notices of the Document.
E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
H. Include an unaltered copy of this License.
I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

©Thomas Haenselmann – Department of Com
Science IV – University of Mannheim