Lecture on Sensor Networks

Copyright (c) 2005 Dr. Thomas Haenselmann (University of Mannheim, Germany).
Permission is granted to copy, distribute and/or modify this document
under the terms of the GNU Free Documentation License, Version 1.2
or any later version published by the Free Software Foundation;
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts.
A copy of the license is included on the last pages entitled "GNU
Free Documentation License".

time

©Thomas Haenselmann – Department of Com
Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer in sensor networks (radio networks):

The following circumstances cause problems concerning energy efficiency:

idle listening:	A node monitors the medium although no sender is active. Without special precautions it is unknown when the next sender will become active, so the monitoring cannot be omitted easily.
over emitting:	A node sends a message while the recipient is at least temporarily unable to listen.
overhearing:	A node receives a message (completely), which is addressed to someone else. Without special precautions the message has to be overheard to receive the following message.
collisions:	Two nodes transmit at the same time. Hence, the messages destroy each other on the recipient's side. At least two senders waste energy.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer in radio networks:

In contrast to cable-based channels the sending range of a station in a radio network is limited. Hence the problem arises that by transmitting a station creates collisions in a distance where it cannot detect them any more (hidden station problem) or that it locally detects a collision that doesn't occur any more on the recipient's side (exposed station problem):

Hidden Station Problem:

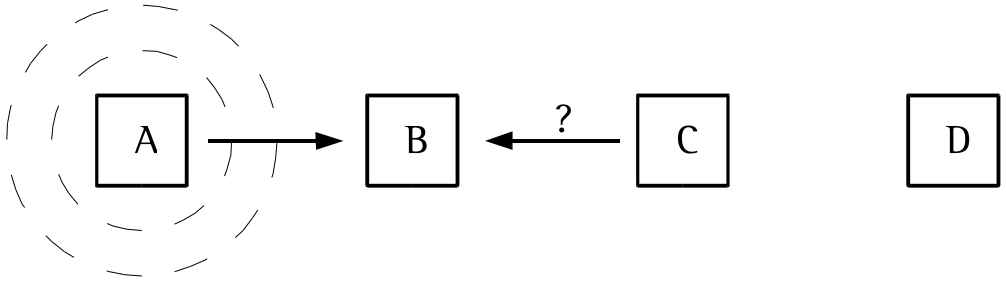

Exposed Station Problem:

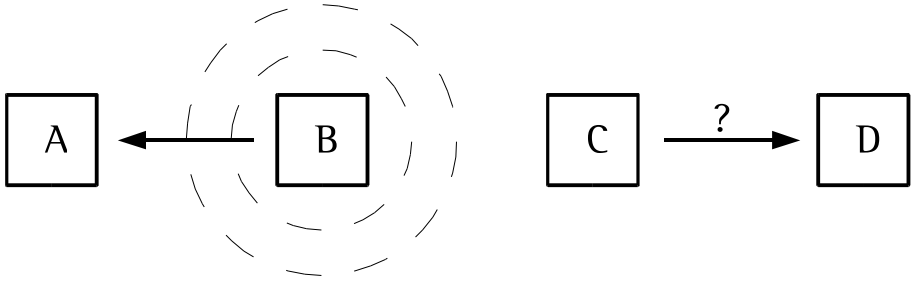

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer in radio networks:

Difference between medium access in cable communication and radio transmission: On a cable the conditions on the sender's side equal those on the recipient's side. The sender can derive from its local observations whether a transmission makes sense for the recipient. Basically, only the recipient's ability to listen undisturbed is of interest. In radio networks the remote conditions cannot be derived from the local observations.

Solution: The detection doesn't happen „electronically", but has to be handled by a protocol.

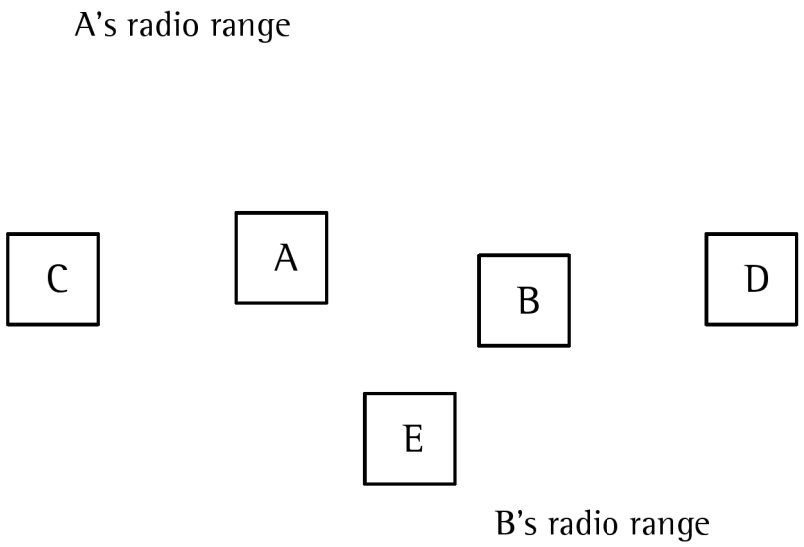

Remark: In reality, in addition to its transmitting range a sender also has a disturbance range, in which its packets aren't understood any more, but still cause collisions. The circular resp. spherical area around a sender is a simplification, too. By interaction with the environment the real reception areas look different in most cases.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

The RTS/CTS-Scheme:

Implemented in MACA (Medium Access with Collision Avoidance) and adopted in 802.11 to ensure an undisturbed reception:

(1) Sender A asks B: Request to Send (RTS). An RTS packet contains the recipient of the message and the length of the message to follow.

(2) If the RTS packet arrives on the recipient's side, the latter sends: Clear to Send (CTS). The CTS packet contains the length of the message to be expected soon copied from the RTS packet.

(3) After the original sender received the CTS packet, the message itself is transmitted.

Optional: (4) The recipient can use the checksum to verify whether the message was received (hopefully) correctly and send an acknowledgment (ACK).

Alternative: It can also be left to the higher transport layer to detect a missing message and to request it again (resp. to provoke a repeated transmission by not acknowledging it). But this takes remarkably longer and requires a new contention-phase (idle medium, RTS/CTS etc.)

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

The RTS/CTS-Scheme:

Ensuring an undisturbed reception:

What are the others doing?

(1) An RTS could collide with another RTS, e. g. if E also wanted to send. Both senders don't receive a CTS, because their messages collided (possibly undetected by them) on the recipient's side. Then both senders wait for a random amount of time before they assume that no CTS is to be expected. The more impatient one will first make another attempt, the more patient one detects this and waits.

(2) The RTS is e. g. also heard by C. But C realizes that it isn't the recipient. On the other hand: If C would send it wouldn't disturb B, because they can't hear each other anyway. Nevertheless, C has to be quiet until at least a possible CTS safely arrived at the sender. Otherwise C would sabotage communication between A and B. But: C could send afterwards. Certainly, A thereby does no more understand its own message, but this has no effect on the reception at B. Yet an unsolved problem: C could send but it would not be able to receive anything (e.g., a CTS from someone else).

(3) D receives B's CTS, too. Because B intentionally included the length of the packet to be expected in the CTS packet, D knows that it has to be quiet at least until the end of A's message, even if it cannot hear this packet anyway.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

The RTS/CTS-Scheme:

Ensuring an undisturbed reception:

How is the channel accessed in 802.11?

After a successful transmission a new frame time begins. Now, nodes can express their intention to send. But first the nodes have to wait for the amount of time that an ACK needs. If the ACK wouldn't arrive at the receiver, the last transmission would have to be considered invalid. Afterwards a contention phase with 31 time slots begins.

Every sender draws a random number of the interval [0,31] and monitors the channel until this time slot. If the channel has been occupied before by another sender, the later sender defers its intention to send. Otherwise it „won" the channel, unless another sender has drawn the same number. Then both RTS packets will interfere and a CTS is not to be expected.

Beyond that the time slots in the contention phase are doubled to 63, another failure leads to another doubling and so on. Hence the protocol automatically adapts to different numbers of participants.

Why are discrete time slots used and not constantly distributed waiting periods?

Answer: Because switching from receiving to sending takes a certain amount of time. The time slot is chosen long enough to regard switching times.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Kommunikation in Sensornetzen

MAC in radio networks

RTS/CTS-Schema

S-MAC

T-MAC

Wise-MAC

AMRIS

Signalling channel as solution to the hidden terminal/exposed station problem:

PAMAS – Power Aware Multi-Access protocol with Signalling for Ad Hoc-Networks
by S. Singh and C. S. Raghavendra

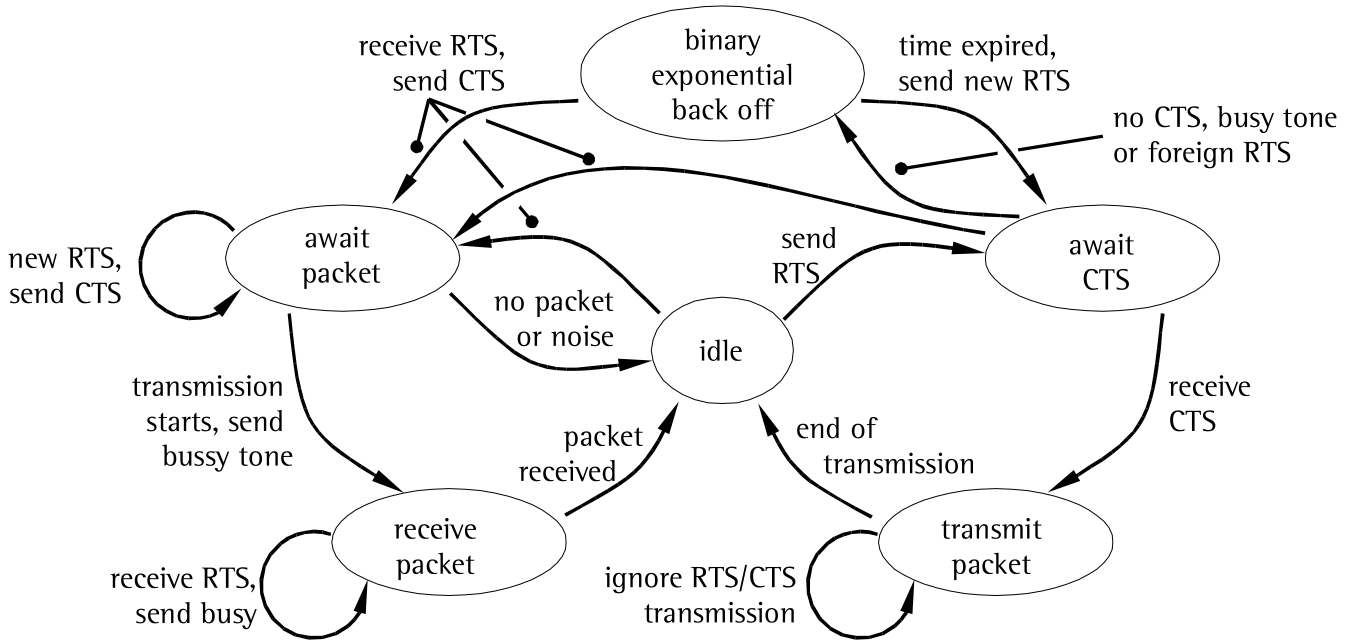

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC protocol: An adaption
for sensor networks

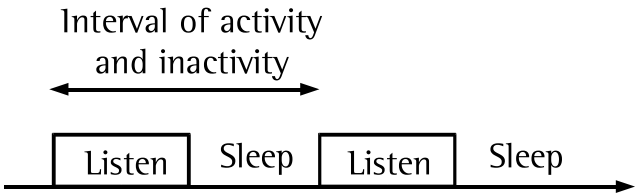

Principle: All nodes have a so-called schedule, which divides time into listen- and sleep-periods. Nodes try to join into groups as large as possible that follow this scheme of sleeping and listening periods.

How can the relation between listen- and sleep-periods be optimized?

Involved values: Max. resulting data rate (specified by external events and sensors), max. transmission rate, buffer size of the node, tolerable latency

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC protocol: An adaption for sensor networks

Listen period: As short as possible, because eng. consuming. But long enough for the max. resul-ting data rate. Otherwise data have to be rejected at the end of the sending period.

Sleep period: As long as possible. But meanwhile data has to be stored. The buffer size limits the length of the sleeping period.

total frame length: = Listen+Sleep: Has to guarantee the maximum latency. On the other hand: Turning the RF-unit on and off costs time and energy, too.

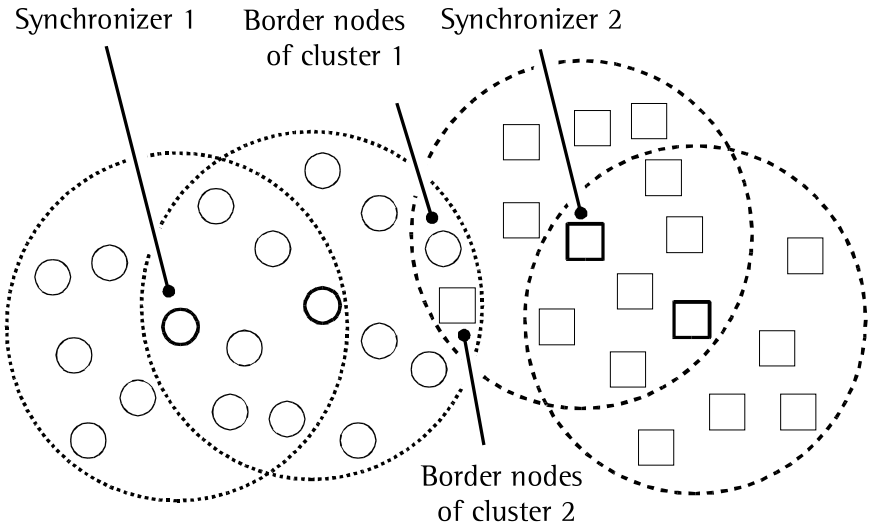

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC Protocol: An adaption for sensor networks

Initialization phase

Synchronizer: After dropping the nodes, all of them wait for a random amount of time and listen whether another node sends the first message. If no one does, the most impatient node sends a SYNC-message. It contains information that the node will go to sleep in t seconds. The first node is also called a synchronizer, all others are followers.

Follower: All nodes in the radio range receive the initial SYNC-message and decide to go to sleep at the same time as the synchronizer. They wait for a random time d and announce after the d seconds that they are going to sleep in t-d time units, like the synchronizer. What is the waiting period good for? Otherwise all nodes would transmit at the same time and hence would certainly create collisions. By the repeated SYNCs other nodes in the vicinity are also integrated in the virtual cluster, if they do not already follow another synchronizer.

All recipients: Every SYNC-packet also tells alls recipients which nodes are in sending range and which schedule they belong to. This will often, but not necessarily, be the recipient's own schedule. The knowledge of the „other" listening periods is important for addressing the neighborhood.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC protocol: An adaption for sensor networks

What happens to nodes within the same sending range, but belonging to different virtual clusters, like A and B in the example below?

Strategy 1 (Receiving at the time of the others): A node records both schedules. Advantage: It can participate in both clusters and works as a transponder which can transport messages from cluster to cluster, especially broadcast messages. Disadvantage: It has to listen for a time twice as long as normal nodes. Although it has an important function for connecting the clusters, it will fail much sooner than other nodes.

Strategy 2 (Sending at the time of the others): The node sticks to the schedule it took on first, however it saves the nodes of other clusters in sending range together with their schedules. Hence it can reach the other nodes if required (by rising early). Disadvantage: Broadcast messages can not be safely delivered across cluster borders.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC protocol: An adaption for sensor networks

Exceptional situation:

From time to time every node has to listen to the channel for a full frame length. Why?

Because new nodes could be added which could already have synchronized with other neighbors. These new neighbors can only be safely detected by listening for a complete frame length. It is also possible that the new neighbors connect two sub-networks (so-called partitions) that did not know each other before.

When should a node transmit a broadcast-message for everyone?

(a) at the time of the own schedule
(b) at the time of the neighboring cluster's schedule

Answer: Always at the time of the own schedule. Because at least with strategy it is certain that everyone is listening, even those not belonging to the own cluster. If the node would send at the time of a neighboring cluster's schedule there would probably be sleeping nodes within the sending range.

But with strategy 1 no node in the sender's range would sleep at the time of the sender's schedule. Why? Because the latter announced its own sending time and all nodes could register it.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC protocol: An adaption for sensor networks

Time synchronization

The listening phase is divided into two sections, a SYNC- and an RTS-phase. The SYNC-phase is used to readjust the timers to avoid a long-term drift.

In larger intervals every node sends a SYNC-packet like the one known from the initialization phase. This SYNC has the task to (1) re-synchronize other nodes and (2) give newly joining nodes the chance to integrate into a cluster. Access to the medium is in both cases negotiated by using a random waiting period. The node that occupies the medium first, „wins“ it. In the SYNC-phase the first node is also the one that may announce its time.

The random syncing scheme does not guarantee that all nodes adjust their timers in the same way but it does prevent very large clock drifts.



©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

S-MAC protocol: An adaption for sensor networks

Collision avoidance and avoidance of overhearing

In principle collision avoidance works like the RTS/CTS scheme. But a node should go to sleep whenever a packet for a foreign addressee is sent. This is possible because both the RTS and CTS packets contain the length of the packet to expect.

If the node wants to execute other tasks, at least the RF unit should be turned off. Then a counter, the so-called Network Allocation Vector NAV, with the waiting period has to be set. Every time unit the NAV is decremented by one (e.g. interrupt controlled). The node is allowed to send only when NAV == 0. Otherwise it is known that the medium is occupied anyway, even without „physically“ testing it. This procedure is also called virtual carrier sense.

At the end of the virtual carrier sense the medium is in fact monitored and after a random waiting period an occupation attempt is started (using RTS/CTS). Otherwise the node has to wait again for the length of the incoming packet.

Conclusion: Avoidance of overhearing by virtual carrier sense
Avoidance of collisions by a random timer and physical carrier sense in combination with the RTS/CTS scheme

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

Improvement T-MAC:

Basic problem of S-MAC are relatively long active periods. But these have to be long enough to handle the largest amount of data that might occur. In all other cases unnecessarily long waiting periods have to be accepted. An intuitive solution would be...

to define a timeout TA. TA should be chosen a bit longer than the longest backoff-time (max. random waiting period for channel access). If this time is over, maybe there is no new desire to communicate. As a consequence all nodes may go to sleep.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

Improvement T-MAC:

Problem: The approach works within a 1-hop neighborhood. At the same time sending intentions could emerge in the proximity of the communication pair of nodes as well.

Nodes in the direct neighborhood of the sending pair A/B e. g., C below would like to address more distant nodes, like D. However C can not inform D about the intended communication as this would disturb the communication between A and B.

Node D does not hear any communication at all and goes to sleep. This is why it can not be reached by C anymore, even after A and B have finished.

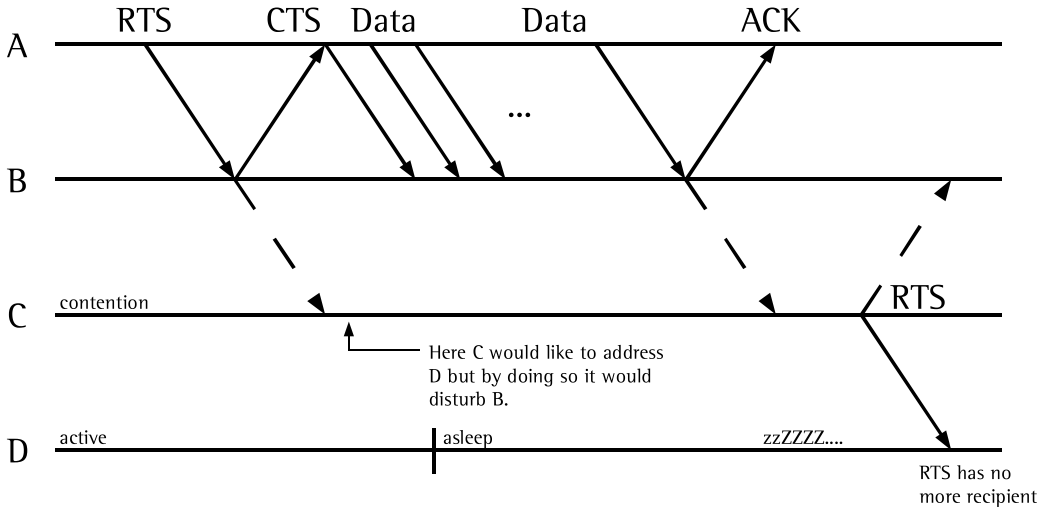

Note: The problem arises in particular with asymmetric communication with one predominant direction (from the source(s) to a sink).

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

Improvement T-MAC:

Solution 1: The prevented sender C may announce its future sending intention after all. In the example node C is waiting for the CTS of B, but then sends its own FRTS (Future Ready-To-Send). Normally this would collide with the data of A and garble B's data packets. Since A knows this, it sends a DS (Data-Send). The DS has no deeper meaning and can hence be destroyed without problems. D can sleep for the time contained in the FRTS (copied by C from B's CTS).

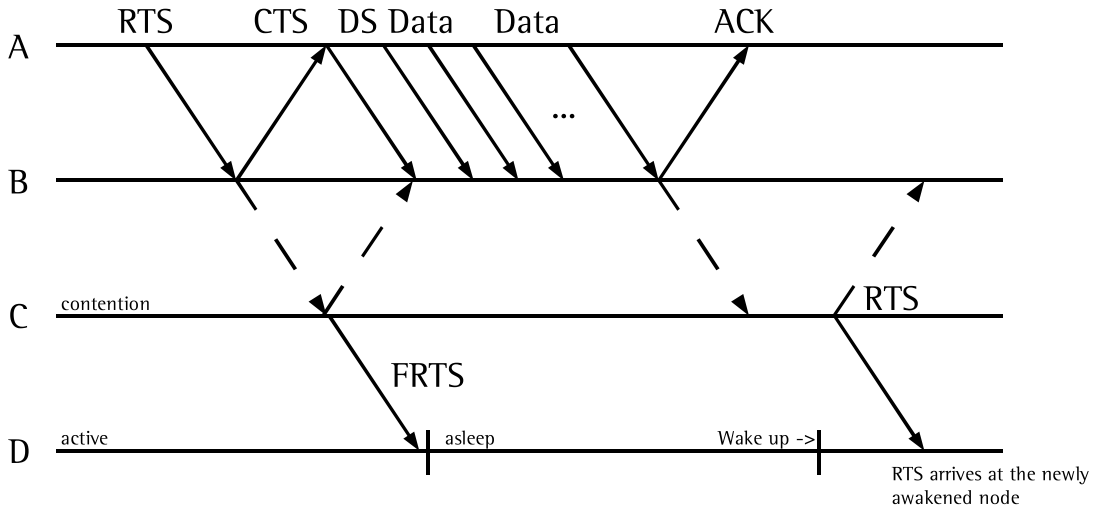

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

Improvement T-MAC:

Solution 2 (full-buffer priority): We accept that nodes in a further distance go to sleep. Instead all mutual communication between neighboring nodes is done in one pass (if possible). If (in a one-way communication) a receiver's buffer is in danger of overflowing, it simply stops accepting data, hence ignoring further RTS request and tries to win the medium itself by issuing its own RTS to get rid of the full buffer. Which problems may occur?

The approach only works if the transmission is addressed to a sink. Otherwise the nodes may mutually ignore one another and create dead-lock situations.

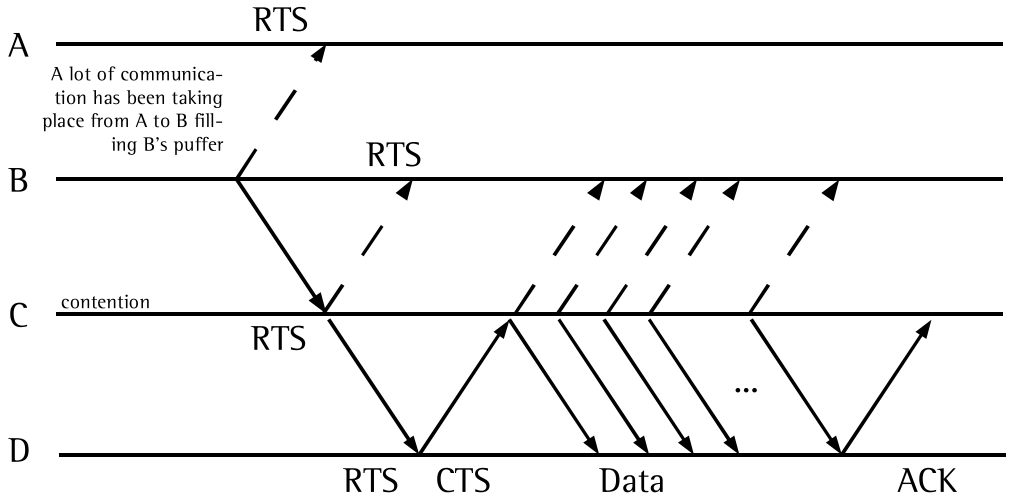

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

WiseMAC basically works like CSMA with Preamble Sampling.

Problems with Preamble Sampling

(a) The long preamble time a sender needs, only to occupy the channel without transmitting relevant information.

(b) In the preamble phase the recipient is so to speak „picked up“ to eventually* be available for the real data transmission. Unfortunately in the meantime all other recipients are picked up, too, but without any benefit. Although they can „oversleep“ the data frame, they have to wait at least until an RTS resp. CTS. Thus a lot of energy is wasted.

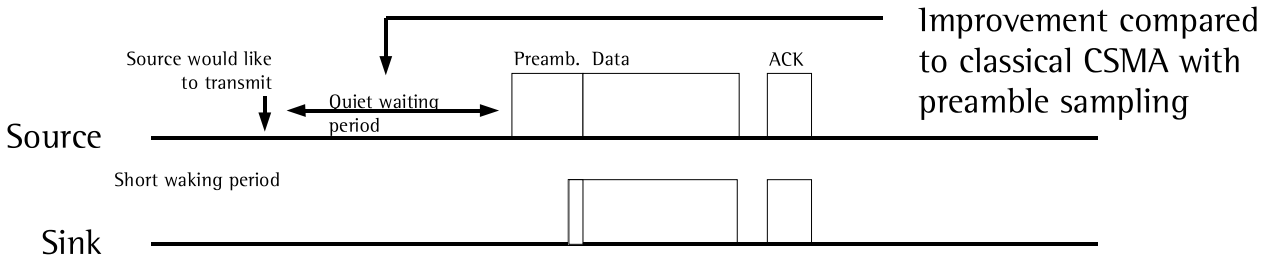

*letztlich, nicht eventuell

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

WiseMAC

Improvement of WiseMAC: Every node remembers the waking moment of its neighbours (relative to its own one). Shortly before the awakening of the recipient the channel is occupied by a sender.

The point of time when a node will wake up is contained as additional information in its ACK packets (possibly piggy-packed onto the RTS or CTS as well). The ACK packets could of course be used by accidentally woken, but uninvolved nodes to apply a correction of their knowledge about the waking moment of the ACK-sender. In contrast to S- and T-MAC every node has its own random waking moment in WiseMAC.

Synchronization problem: If sender and recipient did not hear from each other for some time their clocks may be out of sync. The longer this time, the sooner the sender's preamble-time has to start before the expected awakening of the recipient.

What's the upper limit for the preamble-time?

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

Problems of the MAC-layer especially in radio networks:

WiseMAC

Collision problem: If several senders decide to address a data frame to the same recipient, the preamble and even more severe the following data frames collide in any case. Thus the preamble length has to be increased by a random amount of time. Again, a multiple of the RF unit's switching time is chosen for this, like with 802.11. That way a single sender probably wins the contention phase created by the slightly differing beginnings of the preamble. A later sender hears an ongoing preamble and defers its communication.

Advantages of WiseMAC: Low overhead for senders due to short preambles.

Disadvantages: As not all nodes listen all the time, broadcast messages are not more possible (solution: The sender switches to long Preamble times).

In any case uninvolved nodes wake up during the data frame. Unfortunately the data then can not be overheard that easily because the packet's length is unknown to accidentally involved nodes. On an average 50% of a data frame has to be overheard, if it has been caught in the middle.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

The purpose of the AMRIS protocol is to create a multicast-tree in a wireless ad-hoc network with many recipients that want to join a certain session. The protocol is especially stable for moving, vanishing and newly appearing nodes.

In the context of sensor networks it is rather rare that a source sends large amounts of data to the nodes. But the protocol is also appropriate to build a distribution tree for requests. Nodes with different equipments may join different groups, e.g. one for each sensor type (temperature, light, humidity etc.) or they may join a group which aggregates nodes from the same location.

The tree can be used for an efficient distribution of requests. Furthermore it can be used to send collected data back to the sink (often at the same time the source of the request) on an optimal way.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Task: A source wants to send data to potentially many recipients in a wireless ad-hoc network (task of layer 3)

Requirement: It should not matter whether the underlying layer 2 (link layer) supports unicast only or broadcast as well.

2 phases of the protocol:

(1) Initialization phase
(2) Join phase
(3) Maintenance phase

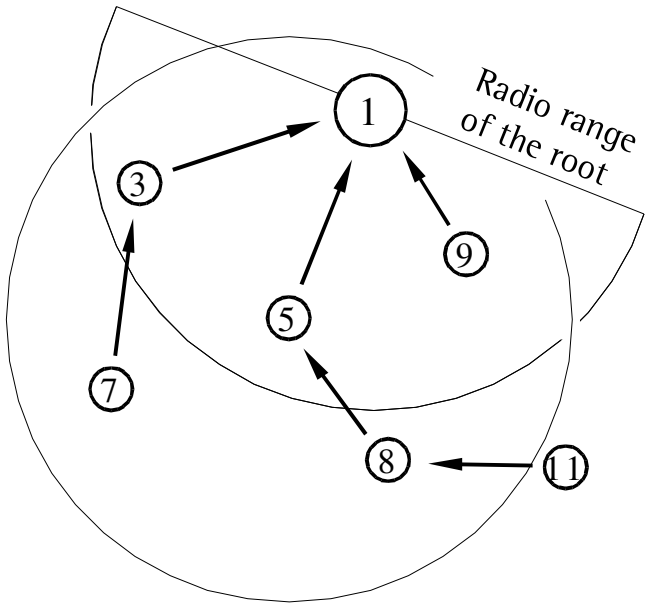

Remark:

Broadcast: Message to everyone
Multicast: Message to a group

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Initialization phase

Source sends initial messages: NEW_SESSION(sessionID, msmID, routingMetrics)

Recipients wait for a random period. The one with the shortest waiting period will repeat the NEW_SESSION-message. It replaces the msmID (multicast membership ID) by a larger, but not successive value.

The gap between the IDs is needed to simplify the later inclusion of additional nodes.

As a routing metrics we can use e.g. the number of hops to the root node.

Every participant remembers a table with all known neighbors. The entries of the table have an expiration date, for the case that a neighbor is not heard for a longer period.

Double msmIDs can only be avoided locally due to the hidden-station problem.

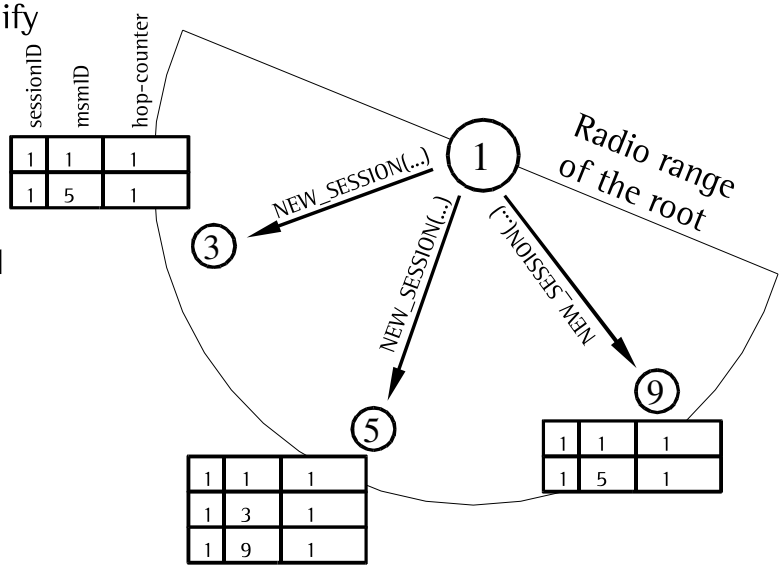

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Initialization phase

Every node is responsible for the choice of its parent node. For this it chooses a node with a good metrics, hence e.g. a short connection to the root node (the source of the later requests).

After the node's timer expired it announces a NEW_SESSION-message itself with the already mentioned higher msmID of the best parent node it has found so far. There is no guarantee that more suitable parents could emerge later. These are – like all nodes – added to the neighborhood table, but the parent isn't changed any more after the NEW_SESSION message has been issued. Otherwise the recently sent NEW_SESSION-message would have been wrong (because it has to conform to the parent's ID, plus an offset).

Until now no nodes joined the multicast-session. Only the neighborhood information was exchanged.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Joining a group

A node X wants to join a group.

Its neighborhood table contains fellow nodes with larger and smaller msmIDs. The smaller ones tend to be nearer to the root node (but not necessarily). So X sorts the neighbors in order of increasing msmIDs and sends JOIN_REQ messages to potential parent nodes Y. If the number of hops was chosen as a routing metrics only those nodes with a smaller number of hops (to the root) should be addressed.

Reaction of a potential parent node Y:

Y checks whether it is a member of the requested group already. If so it sends a JOIN_ACK immediately. Now X belongs to the group and will receive future request directed to this group.

If Y is not yet member of the group it acts as if it wanted to join itself. If a group-participant was found on the way up to the root the recursion will descend down to the initial requester. Another branch of the tree has now established.

Note that dead ends can emerge if nodes move away or stop working. In such a case the way via parent nodes to the root node might be blocked.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Maintenance-Phase:

After the initialization nodes send so-called beacons regularly which contain the well known triple (sessionID,memID,hops). Neighbors will hear these beacons and update their table entries accordingly.

In particular every table entry contains a date of expiration. It is set to zero each time a beacon arrives for a neighbor but it is incremented each time the beacon was missing. After three missing beacons in succession a node concludes that it has missed its neighbor and deletes the entry from the neighborhood table.

Disconnected branches in the tree:

Table update as described above are common in AMRIS unless a node's father was lost. In this case a nodes has to find another link under all circumstances in order to reconnect itself and all of its children. This is called a Branch Reconstruction which has two phases BR1 and BR2.

BR1:

Like in the initial joining phase a JOIN_REQ is sent to all possible parent nodes in turn. On success a father acknowledges the request with a JOIN_ACK. Otherwise it has to search its own environment for possible parents which can satisfy the request. Nodes which only serve the request of their children are called intermediate nodes.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Maintenance-Phase: BR1 (continued)

If the reconstruction BR1 was not successful JOIN_NACKs are sent as negative acknowledgments on the reverse path back to the requester. The initiator (which is the only non-intermediate node on the path) gets to know the result at last. It will then iterate over other possible parent nodes (with a smaller number of hops to the root). If all request have been unsuccessful the second branch reconstruction phase BR2 is started which is the most expensive phase of AMRIS.

BR2:

So far only unicast JOIN_REQ message were sent. Now requests will be sent as broadcast messages directed to all neighbors at the same time which includes nodes with a smaller and larger number of hops. If the link layer does not support broadcast (like e.g., in WiseMAC) messages have to be send individually to each neighbor. A nodes Y receives a broadcast BJOIN_REQ. In case it is already member of the group it will answer with a JOIN_ACK as a unicast response. However this time the JOIN_ACK does not yet establish a branch of the tree because the initiator X will possibly get a larger number of positive answer and will chose the best among all of them. Only the optimal partner will get a JOIN_CONF which eventually establishes the branch of the tree. Every broadcast BJOIN_REQ includes a TTL (Time-To-Live) counter which is decremented by one in each hop. This prevents the flood from reaching all parts of the network. Especially those far beyond the root will likely not be helpful for the reconstruction.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

Communication in sensor networks

MAC in radio networks

RTS/CTS-Scheme

S-MAC

T-MAC

Wise-MAC

AMRIS

AMRIS: Multicast Protocol for Ad hoc Wireless Networks

Maintenance-Phase: BR2 (continued)

Finally a node with receives a BJOIN_REQ and is not member of the group broadcasts the request further itself.

General remarks:

The BR2 phase can be used in the same fashion if joining a group via one of the parent nodes was not possible.

Newly deployed nodes which do not yet have a msmID will listen to the beacons of the neighbors for a while before choosing a parent and announcing their chosen msmID. The reason why nodes do not use successive msmID in the beginning it due to the fact that these gaps can now be used by the newly deployed nodes.

The protocol is particularly stable in scenarios with moving nodes. In the context of sensor networks it deals well with vanishing and newly deployed nodes however at the expense of having to send beacons. Note that beacons can only be combined with a few eng. efficient MAC layer protocols.

©Thomas Haenselmann – Department of Computer Science IV – University of Mannheim

GNU Free Documentation License
Version 1.2, November 2002

Copyright (C) 2000,2001,2002 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

©Thomas Haenselmann – Department of Com
Science IV – University of Mannheim

A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
D. Preserve all the copyright notices of the Document.
E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
H. Include an unaltered copy of this License.
I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

©Thomas Haenselmann – Department of Com
Science IV – University of Mannheim