

# 8. Automatic Content Analysis

- 8.1 Basic Parameters for Video Analysis
- 8.2 Deriving Video Semantics
- 8.3 Basic Parameters for Audio Analysis
- 8.4 Deriving Audio Semantics
- 8.5 Application Examples

# Automatic Content Analysis - What for?

The first generation of multimedia computers could only transmit digital video and audio streams and play them out on a device (monitor, speakers). Due to increased performance, current multimedia computers allow the **processing** of multimedia streams in real-time.

An expanding field of research is the **automatic content analysis** of audio and video streams. The computer tries to find out as much as possible about the content of a video. Application examples are:

- the automatic indexing of large video archives, e.g., at broadcasting companies,
- the automatic filtering of raw video material,
- the automatic generation of video abstracts,
- the automatic analysis of style characteristics in artistic film research.

A Graduate Course on Multimedia Technology	© Wolfgang Effelsberg, Ralf Steinmetz	8. Automatic Content Analysis	8.1-1
---	--	-------------------------------	-------

A Graduate Course on Multimedia Technology	© Wolfgang Effelsberg, Ralf Steinmetz	8. Automatic Content Analysis	8.1-2
---	--	-------------------------------	-------

# 8.1 Basic Parameters for Video Analysis

The content analysis can be divided into three processing steps:

- determination of basic (physical) parameters from the digital data stream,
- computing of semantic features on a higher level of abstraction,
- editing and concatenation of the various algorithms to form user-friendly applications.

In the following, we will discuss the above topics for video (both still images and sequences of images) and audio.

## 8.1.1 Analysis of Still Images



### Color Histograms

The easiest and most important characterization of a still image is its color histogram. It describes the occurrence of the different colors (resp. gray-scale values) in the image.

The histogram of a color image has three dimensions (i.e., RGB or YUV), while it is one-dimensional for gray-scale images.

The color histogram of an image is often used as a simple search filter in image data bases when the objective is to search for images similar to a given query image.


## Sample Gray-scale Histograms

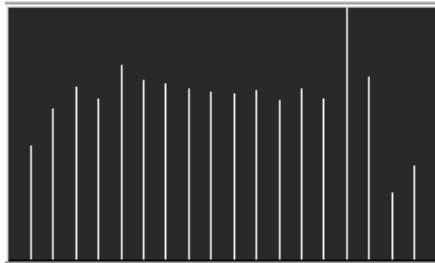

## Tessellation

A major drawback of color histograms is that they do not discriminate the location and grouping of colors in the image. Examples:

- an image containing much sky might have a similar color histogram as an image containing much water,
- an image of a sunset might have a similar histogram as an image showing Californian poppies.

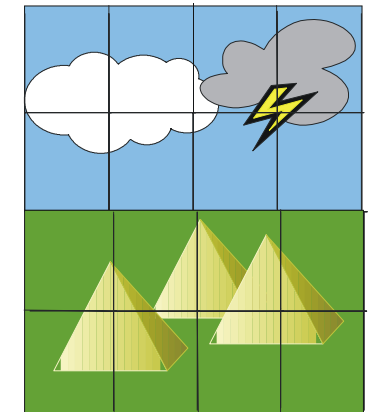

A first improvement is the **tessellation** of an image into a mosaic of rectangles of equal size. One then demands that similar colors appear at the same locations.

## Color Coherence Vectors

A **color coherence vector** (CCV) contains two entries per color value:

- the percentage of pixels contained in a region of size above average, and
- the percentage of pixels contained in a region of size below average.

$$\text{CCV} = \langle (\alpha_1, \beta_1), \dots, (\alpha_n, \beta_n) \rangle$$

Color coherence vectors facilitate the description of similarities between images. They do not identify the exact position of an object, but they allow to discriminate between the appearance of a specific color in few large regions or in many small regions.

A Graduate Course on Multimedia Technology	© Wolfgang Effelsberg, Ralf Steinmetz	8. Automatic Content Analysis	8.1-7
---	--	-------------------------------	-------

## Edge Detection

Another interesting low-level parameter for the analysis of an image is the occurrence of edges. They delimit the various objects contained in an image. **Edge detection** is an important field of research in image processing.

There are many approaches to detect edges in an image. Two of them are:

- line tracing, i.e., a given part of an edge is traced along the border of an object, and
- region growing, based on the color values of the pixels.

In practice, region growing is usually less sensitive to noise.

A Graduate Course on Multimedia Technology	© Wolfgang Effelsberg, Ralf Steinmetz	8. Automatic Content Analysis	8.1-8
---	--	-------------------------------	-------

## Algorithm “Line Tracing”


1. Start with a pixel located on the edge that is to be followed.
  2. For all end points of edges found so far:
    - 2.1 Investigate the 1-pixel-neighbourhood of the end point
    - 2.2 If a neighbouring pixel has a difference in color value of  $\Delta_c$  or less, then add this pixel to the line
- until no more progress can be made.

Two problems immediately emerge:

1. What is a best value for  $\Delta_c$ ?
2. What happens if the real edge is interrupted by noise? Should the search area be enlarged? Should we interpolate? Across how many pixels?



original image



noisy image

## Algorithm “Region Growing”

1. The initial set of regions is empty.
2. Find an arbitrary pixel that is not yet contained in a region. This pixel defines the current region.
3. Repeat for all pixels within the current region:
  - 3.1 Investigate the 1-pixel-neighborhood of the pixel
  - 3.2 If a neighboring pixel has a color difference of  $\Delta_c$  or less, then add it to the region
4. If there are still pixels not belonging to any region, proceed with step 2.


The parameter  $\Delta_c$  is the **threshold of homogeneity** of the regions.

## Problems with “Region Growing”

It is possible that a sequence of pixels located at the border of the current region and fulfilling

$$|c_{i+1} - c_i| < \Delta_c$$

spoils the edge.

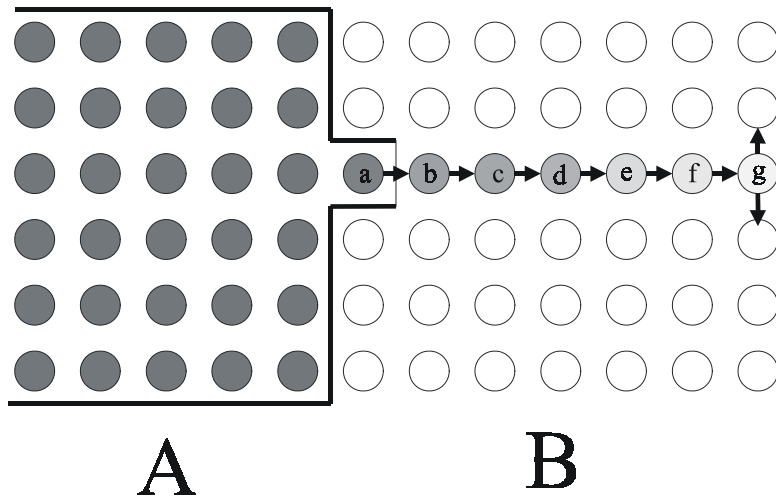

Note: There exists a dual algorithm to region growing, called **region splitting**, as well as a combination of both to the so-called **split-and-merge** algorithm. In practice, the latter often works best.

## The threshold of homogeneity is critical!

A good setting of the threshold of homogeneity  $\Delta_c$  is crucial for the algorithm to work. A wrong parameter value leads to over- or under-segmented images:

original image



good segmentation



over-segmentation




under-segmentation




## Segmentation Example

A colored ball rolls in front of a gray background. It can be segmented by means of edge detection. The image below has been obtained with the algorithm **region growing**.

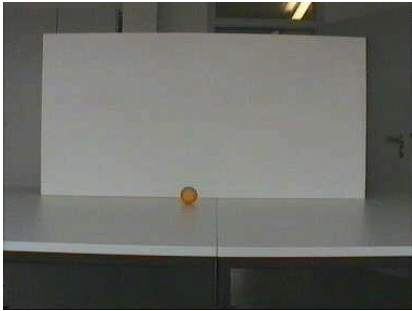

original image

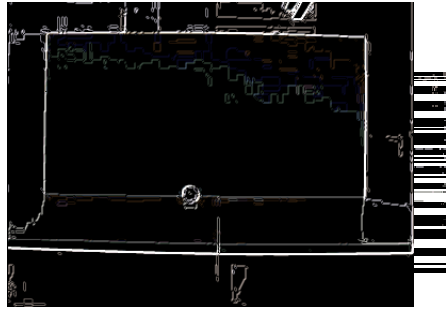

segmented image

## Object Segmentation

Edge detection is the basis for many **object segmentation** algorithms. Object segmentation tries to identify semantic objects within an image.

Unfortunately, the edges, as derived by the basic algorithms described so far, hardly ever correspond to the real borderlines of a semantic object! Problems are due to:

- objects that consist of several regions of different colors (e.g., a person with a white shirt and blue pants),
- partial occlusion of an object,
- objects at image boundaries that are only partially visible,
- objects that change their shape over time (e.g., people),
- etc, etc.

We conclude that **object segmentation is one of the hardest problems in image analysis and computer vision.**

## 8.1.2 Analysis of Frame Sequences

The analysis of frame (or image) sequences can help to obtain a better understanding of video content.

The **movement of an object** can carry semantics. For example, a zigzag movement could be characteristic for a downhill skier.

In many cases, motion detection can facilitate object segmentation. The human visual system is highly based on motion for object segmentation; for example, a bird in a tree is detected only when it moves. This is also true for the visual system of many animals.

A **camera operation** (e.g., panning, zooming) can be distinguished from the movement of an object by the fact that **all** image pixels are affected in a deterministic and computable manner. An example is the lateral motion of all pixels during panning. Thus, camera operations can often be detected automatically.

A Graduate Course on Multimedia Technology	© Wolfgang Effelsberg, Ralf Steinmetz	8. Automatic Content Analysis	8.1-15
---	--	-------------------------------	--------

## Motion Vectors

Modern compression algorithms for video often compute **motion vectors** for pixel blocks. Typical examples are MPEG-1, MPEG-2, H.261 and H.263. The motion of macro blocks does not help much for object segmentation but it allows the detection of camera operations. An advantage is that the required data is readily available for our analysis, without separate (and costly) computation.

**Example:**



A Graduate Course on Multimedia Technology	© Wolfgang Effelsberg, Ralf Steinmetz	8. Automatic Content Analysis	8.1-16
---	--	-------------------------------	--------




## Block-based Motion Vectors

If a monochrome, two-dimensional object moves across the image, motion detection works well only at:

- the edges of the object, and
- only in the direction of the movement.

### Example:

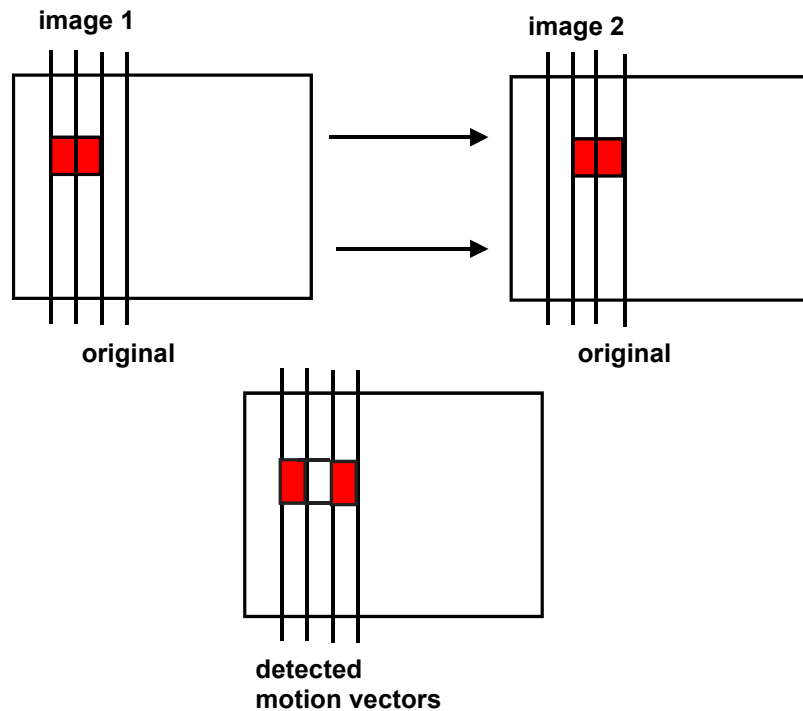


## Optical Flow

The movement of objects in the real world is reflected by color changes in a frame sequence. For simplification, one often restricts the analysis to gray-scale images. The notion of **optical flow** describes the movement of gray-scale patterns in a frame sequence.

In a first step, a motion vector is assigned to each pixel. A continuous **vector field** of all these motion vectors is then computed which represents the optic flow. Both steps make assumptions (e.g., a constant intensity of light), and both are error-prone. A large number of algorithms for the computation of optical flow exists in the literature.


One major difficulty is the determination of the movement of one particular pixel between frame  $i$  and frame  $i+1$  ("correspondence problem"), as shown below.

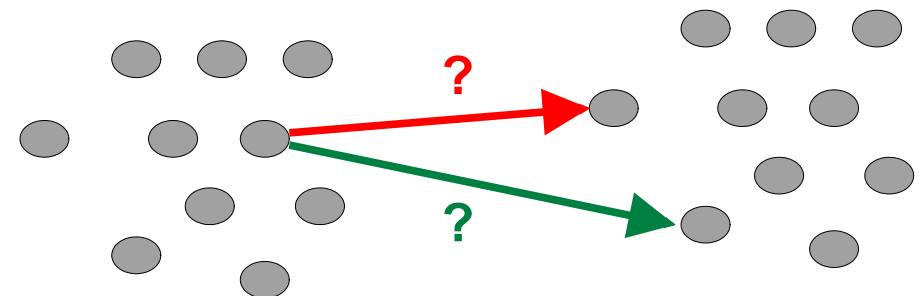


# Problems in the Computation of Optical Flow

Unfortunately, many other problems also complicate the computation of optical flow.


## Examples:



aperture problem



deformable objects



periodic structures

We conclude that the optical flow is difficult to compute, and is often not a reliable indicator for the motion of an object.

# Edge Change Ratio

Once the edges contained in an image are computed (see the section on “edge detection” above), the **edge change ratio** between two successive frames  $i$  and  $i+1$  can be determined. We first compute the pixels of frame  $i$  that are located on edges; their number is denoted by  $s_i$ . Similarly, we compute the pixels of frame  $i+1$  that are located on edges; their number is denoted by  $s_{i+1}$ . Now we compute the number of pixels that are located on edges in frame  $i$  but not in frame  $i+1$  (i.e., the vanishing edges  $E_{out}$ ) and the edge pixels in frame  $i+1$  that were not on edges in frame  $i$  (i.e., new edge pixels  $E_{in}$ ).


The **edge change ratio (ECR)** between frame  $i$  and frame  $i+1$  is then defined as:

$$ECR_i = \max\left(\frac{E_{in}}{s_{i+1}}, \frac{E_{out}}{s_i}\right)$$

For example, the ECR can be used as a simple measure of motion intensity.

## ECR: Improvement by Widening

In order to increase the robustness of this measure with regard to noise and jitter, the edges are often artificially widened.

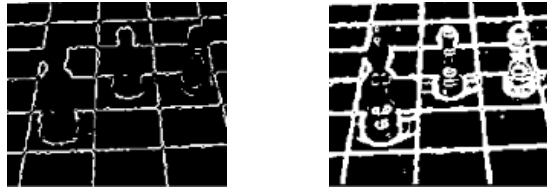

## Algorithm "Compute ECR"

