Lecture on Sensor Networks

Copyright (c) 2005 Dr. Thomas Haenselmann (University of Mannheim, Germany).
Permission is granted to copy, distribute and/or modify this document
under the terms of the GNU Free Documentation License, Version 1.2
or any later version published by the Free Software Foundation;
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts.
A copy of the license is included on the last pages entitled "GNU
Free Documentation License".

time

©Thomas Haenselmann – Applied Computer
Science IV – University of Mannheim

Sensor networks - motivation

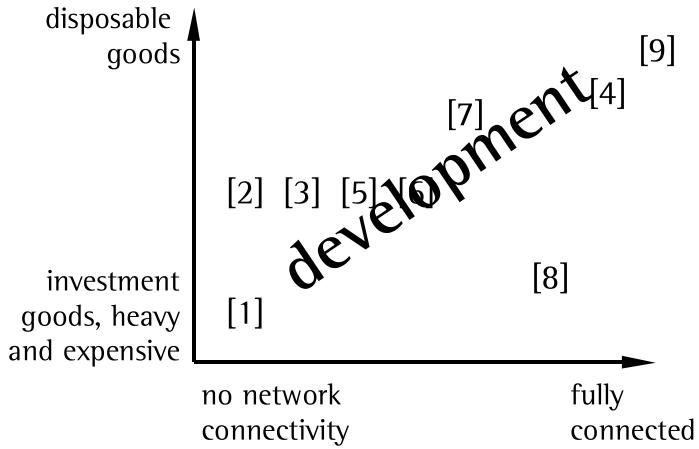

Historical Development

time

[1] IBM S 3/60 (1960)
[2] Apple II (running VisiCalc)/IBM PC/C 64 (1980)
[3] 486er PC, Amiga and modem, acoustic coupler, BTX (minitel in france) (mid 80ies)
[4] Cell phones become bulk article (end of 80ies, beginning of 90ies)
[5] Pentium class PCs, Datex-J, soon replaced by Internet (90ies)
[6] Boring PC-era (getting smaller, faster), increasingly „always-on“ (mid 90ies)
[7] GPRS capable PDAs, vanishing borders between PDA and cell phone (late 90ies)
[8] Connected car
[9] Smart Dust

Historical Development
Applications for sensor networks
Introduction to the ESB
Future Batteries
ESB Terminal commands
Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Applications for Sensor Networks

Monitoring the integrity of buildings and building automation

Early detection of changes in the structural integrity, developing over the years or after an earthquake. This could be accomplished by sensors which are built into the walls or the concrete without any power supply or network connection. Sensor nodes would only have to wake up between large intervals like minutes or hours working for years or even decades. The dynamics of collapsing buildings could be analyzed after the event by data that may have been sent during the collapse. In particular our ESB nodes can be woken up by timer events as well as vibration or tilt events.

Each light bulb could be a sensor node. A broken build could e. g., trigger a switched off neighbor to switch its state. No complex and expensive wiring or control wires would be necessary. Bulbs could also be triggered by activity in a room with motion sensors like they are used for the ESB nodes. Furthermore every bulb could be a part of a distributed alarm device measuring movements in a building. Simply unplugging the system would not be trivial anymore as there would be no single point of failure.

Sensor nodes could server thermostats with no wiring overhead. Every room could be controlled independently.

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Applications for Sensor Networks

Early discovery of catastrophes like forest fires

By scattering sensor nodes from an airplane over a forest a so called ad-hoc network is built up autonomously. Heat-sensing nodes can signal events like fires over the network. This enables the early detection of forest fires which is crucial for efficient fire fighting.

Medical surveillance and remote diagnosis

In the future long term measurements of vital function might be possible with the help of tiny sensors which could be implantet under the skin, swallowed etc. Small fully encapsulated and disposable video sensors which can be swallowed do already exist which are able to send images from a persons interior for about 24 hours with no surgery necessary.

Burglary prevention

Safety for buildings and other territory without any installations. Surveillance of railroads in order to prevent crashes with animals and humans may be an application.

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Applications for Sensor Networks

Business applications

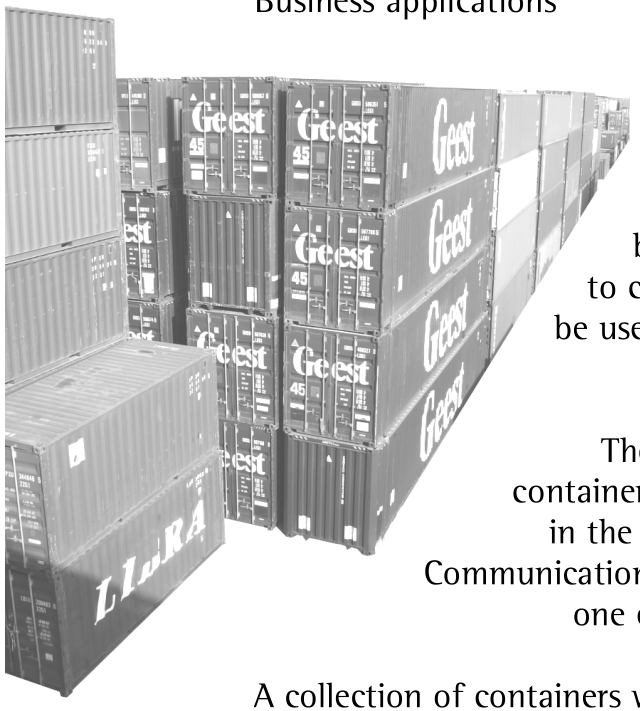

Stock-keeping with connected temperature and humidity sensors contained in packages which can signal high humidity or exceeding temperature. Nodes being added to packages could at the same time be used to carry further information like recipes for food, they could be used to track and authenticate goods like it is already done or planed with the help of RF-IDs.

These sensor nodes could also enable the administration of containers in container harbors. Every container would be a node in the sensor network and could remember its content reliably. Communication over longer distances would be done hop-by-hop from one container to the next extending their range significantly.

A collection of containers would be the database itself and thus is would always be consistent. Ships could easily identify their correct load and a container could even report a missing neighbor.

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Applications for Sensor Networks

Agriculture

Sensor nodes could be added to the seed. By directing a query to the sensor network dry areas could be identified easily. Cattle would also be equipped with sensor nodes in order to track them (that saves on sheep dogs).

Pollution controll

Surveillance of waters: A remote sensor network could be connected via GPSR and a cell-phone with the conventional telephone network and deliver (sparse) data over long distances. Actually the ESB nodes are equipped with a link to a cell-phone. The firmware includes a function to send SMS messages.

Nodes could also be scattered over an industrial site to detect leakages of gas or chemicals and alert in an early state.

Dam protection could be accomplished by including sensors into the dams or between sandbags. Early detection of intruding water could be used to strengthen the dam accordingly.

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Introduction to the ESB (Electronic Sensor Board)

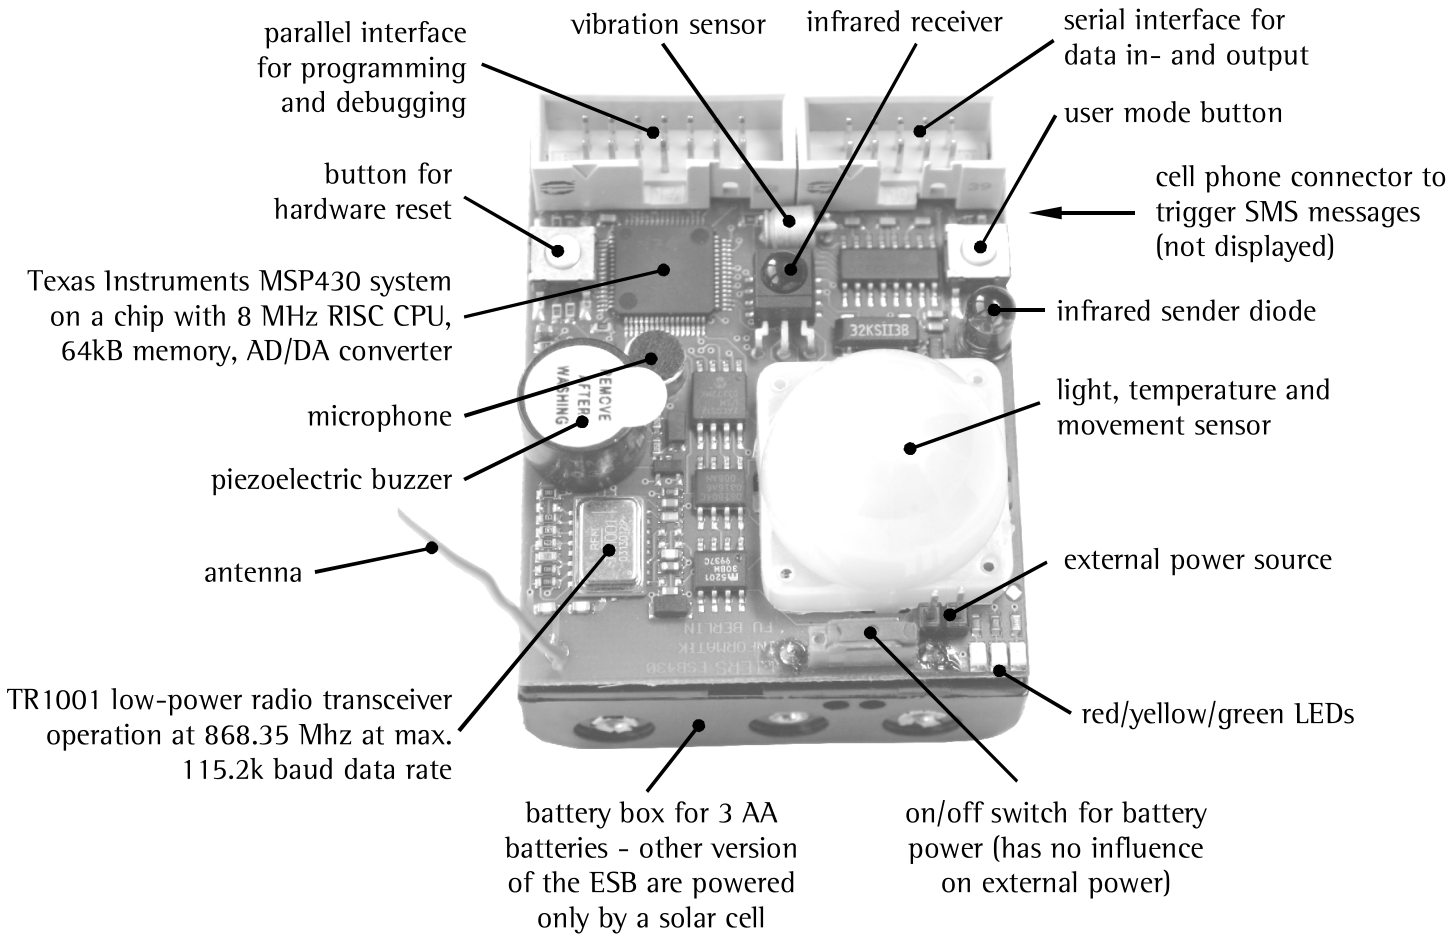

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Memory Organization

Introduction to the ESB (Electronic Sensor Board)

16 addresses for sub-routines	0xFFE0-0xFFFF	Interrupt Vectors
Is written once prior to initialization, however it can be changed in chunks of 512 bytes during operation	0x1100-0xFFDF	ca. 60 kByte Flash-ROM for firmware, programs, data, tables If there's enough energy left, the application can itself write data here!
two small blocks	0x1000-0x10FF	2x128 Byte Flash-ROM
programmed via scatt.-fl.	0x0A00-0x0FFF	Boot-Loader ROM (fix)
only 2kB fast RAM	0x0200-0x09FF	RAM (for variables, stack)
no real memory behind those addresses, but connected with the "outside world" (memory-mapped)	0x0100-0x01FF	16-Bit periphery (Memory mapped) — only word-wise (16 Bit) reading
	0x0000-0x00FF	8-Bit periphery (Memory mapped) — only byte-wise (8 Bit) reading

Historical Development
Applications for sensor networks
Introduction to the ESB
Future Batteries
ESB Terminal commands
Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

16 Bit Multiplications

Introduction to the ESB (Electronic Sensor Board)

Multiplications are not included into the core of the MSP430. However there is a hardware multiplier, which is addressed via the mapped memory for 16 Bit periphery (0x100-0x1FF) just like every other external device (e.g., the light emitting diodes). TI denotes the four types of multiplications with MPY, MPYS, MAC and MACS.

MPY: 1. Operand unsigned Multiplication	0x130
MPYS: 1. Operand signed Multiplication	0x132
MAC: 1. Operand unsigned Mult. a. Add.	0x134
MACS: 1. Operand signed Mult. a. Add.	0x136
2. Operand signed/unsigned	0x138

RESLO: 16 LSW of the result	0x13A
RESHI: 16 MSW of the result	0x13C
SUMMEXT: Sum Extension	0x13E

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Future Batteries

Energy measured in watt hours / gram

Lithium-Ions in chemical batteries:	0,3
Methanol in fuel cells	3,0
Tritium in nuclear batteries	850,0
Polonium-210 in nuclear batteries	57000,0

We assume a degree of efficiency of about 50% for the fuel cell and only about 8% for all radio active isotopes. It still holds true that 0,08 x 57000 > 0,5 x 0,3. Today, a problem with the nuclear batteries is that they deliver too small amounts of energy over a period of several years.

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Connect ESB <-> PC

Change to console 1-4 using Alt+F1-F4

login: sensor <RETURN>
password: . <RETURN>

Console 4: Connect the parallel port with the PC's local IP-network

```
msp430-gdbproxy msp430
```

Console 3: Open a serial terminal for entering commands and reading the ESB's output

```
minicom
```

Console 2: Console needed for programming

```
cd tmp/msp430/userapp
nano src/userapp.c
```
(advanced users may use emacs)

Console 1: console for compiling and flashing programs

```
cd tmp/msp430/userapp
make          compile application and firmware
make flash    automatically flash binary via gdbproxy
              (does not work the first time – repeat as necessary)
```

Historical Development
Applications for sensor networks
Introduction to the ESB
Future Batteries
ESB Terminal commands
Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

ESB terminal commands

Some of the basic features of the ESB node can be used with a simple terminal application which allows to enter commands for the nodes that are transmitted over the serial connection. These commands are executed by the ESB immediately or return values are sent back as ASCII strings.

Sampled values or those which have to be entered (e. g., for defining thesholds) usually range from 0-4095 as 12 Bits are provided by the AD/DA-converter.

LED commands

```
rlr/rlg/rly     read state of LED red/green/yellow
                0=OFF / 1=ON

slr/slg/sly x   set state of LED red/green/yellow
                x=0 (OFF) / x=1 (ON)

swr/swg/swy     toggle state of LED red, green or yellow
```

beeper commands

```
rbp/sbp         read/set beeper state 0=OFF / 1=ON

sbp             set beeper state 0=OFF / 1=ON
```

Historical Development
Applications for sensor networks
Introduction to the ESB
Future Batteries
ESB Terminal commands
Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

ESB terminal commands

energy control

```
rvb/rve       read voltage battery/extern
rbl/rel       read threshold for battery/extern voltage
sbl/sel       set threshold for battery/extern voltage
```

microphone readings

```
rmc           read current value of microphone voltage
rmm           read counter for microphone voltage
rma           read average value of microphone voltage
rmi/smi       read/set sensitivity of microphone
              (noise is below 60)
```

temperature readings

```
rtt           read temperature value
rtl/rth       read low/high temperature threshold
stl/sth       set low/high temperature threshold
rte/ste       read/set temperature alarm enable bit
              the alarm wakes up the ESB based on the
              predefined theshold (stl/sth)
              0=ALARM OFF / 1=ON
```

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

ESB terminal commands

vibration and tilt sensor

```
rms             read counter for vibration sensor
                (accumulated value)
rvs             read both counter and tilt sensor value
```

light sensor

```
rls             read counter for light sensor
rll/rul         read lower/upper threshold for "light-
                alarm"
sll/sul         set lower/upper threshold for "light-
                alarm" - this wakes the ESB up if the sampled
                brightness is in the interval
```

radio transceiver

```
rrp             read current AD value of the transceiver
                (is never zero - why?)
rtp/stp xx      read/set transceiver transmission power
                range for x within [00,99]
rfr/sfr xxxx    read/set transceiver reception theshold
(xxxx < 4096)   (since the transceiver always samples value,
                e.g., noise, signal must be above the thresh.
```

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

ESB terminal commands

miscellaneous

```
rcf             read configuration
rid/sid xxxx    read/set ID of ESB with x in [0000,0255]
raf/saf         read/set announce flag (?)
rmr/smr         read/set receiver's phone number for short
                message service
rsm/ssm         read/set sensor mask
dea             erase complete EEPROM
flx             start broadcasting userapp. (binary)
```

timer function

```
rt5             read 5 milliseconds timer
rdd/rct         read date/time of realtime clock
sdd dd-mm-yyyy  set date of realtime clock (sdd 31-12-2005)
sct hh:mm:ss    set time of realtime clock (sct 23:59:30)
sat hh:mm:ss    set alarm time. This is the time when the
                node should wake up
rce/sce x       read/set alarm time enable bit
                x=0 (OFF)/ x=1(ON)
```

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

ESB terminal commands

infrared transceiver

```
sir xxyy      send RC-5 code via the IR sensor diode
              xx (hex) is the MSB (most significant bit)
              yy (hex) is the LSB (least significant bit)
              Bit 11  :    toggle bit (stable bit=key is
                           kept pressed/changing bit=key
                           was pressed again)
              Bit 6-10:    5 address bit (TV=0)
              Bit 0-5 :    6 code bits   (16=volume++)
              (0 << 11)|(0<<6)|(16)

rir           read last two bytes received by IR diode
```

memory functions

```
reb xxxx       read byte from address xxxx
rer xxxx yyyy  read bytes between xxxx and yyyy
web xxxx yy    write byte yy at xxxx
```

Historical Development

Applications for sensor networks

Introduction to the ESB

Future Batteries

ESB Terminal commands

Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Energy consumption

Important variables:

```
P_RX     4,5mA          energy consumption receiving
P_TX    12,0mA          energy consumption sending
P_CL    12,0mA          basic consumption w/o radio
P_SL     8uA(0,008mA)   energy needed for sleep mode
```

[capacity (watt) = current (ampere) x voltage (volt)]

Rough estimation for energy consumption and sensor lifetime:

Let's assume that each sensor should wake up once a second, measure a value and transmit it over the network.

a) Calculations needed: 5000 instructions (f. measurement and preparation for sending)
b) Time to send information: 50 Bytes f. sensor's data, another 250 Byte for forwarding foreign data
c) Energy needed to sleep for the rest of the second (Sleep-Modus)

Time for calculations and energy consumption

MSP430 running at 8 Mhz clock rate => one cycle takes 1/(8x10^6) seconds
1 instruction needs an average of 3 cycles => 3/(8x10^6) seconds, 5000 instructions 15/(8x10^3)s.
15/(8x10^3) x 12mA = 180/8000 = 0,0225 mAs (milli Ampere seconds)

Historical Development
Applications for sensor networks
Introduction to the ESB
Future Batteries
ESB Terminal commands
Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

Sensor networks - motivation

Energy consumption

Time for sending data and energy consumption

The radio frequency unit sends with 19.200 baud (here approx. by 19.200 bits/second)
1 bit takes 1/19200 seconds. We have to send 50 bytes (own measurement)
and we have to forward 250 bytes (external data): 250+50=300 which takes takes 300x8/19200s
300x8/19200 x 24 mA (energy basic+sending) = 3 mAs (milli Ampere seconds)

Energy consumed while sleeping

Time for calculations 15/8000 + time for transmission 300x8/19200 = ca. 0,127s
Time for sleep mode = 1s – 0,127 = 0,873s
Energy consumed while sleeping 0,008mA x 0,873s = 0,007 mAs

Total amount of energy per second and resulting lifetime

The ESB is needs to be supplied with 4.5V, so we need 3x1.5V AA batteries.

(0,0225 + 3 + 0,007) x 3 = ca. 3x3,03 mWs (milli Watt seconds)
Energy of 3 AA battery: ca. 3x2300mAh = 3x2300x60x60 mWs
Total lifetime: 3x2300x60x60/3x3,03 = ca. 32 days

Critical review

Battery suffers from leakage current (loosing about 10% energy/year)
small network (forwarding takes only 250 bytes)
most important: Only sending was taken into account, not receiving!
If we listen into the channel rather than sleeping 0,007mA has to be replaced by (12+4,5) mA
which results in a lifetime of 2300x60x60/ = ca. 5 days

Historical Development
Applications for sensor networks
Introduction to the ESB
Future Batteries
ESB Terminal commands
Energy consumption

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

GNU Free Documentation License
Version 1.2, November 2002

Copyright (C) 2000,2001,2002 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim

A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
D. Preserve all the copyright notices of the Document.
E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
H. Include an unaltered copy of this License.
I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

©Thomas Haenselmann – Applied Computer Science IV – University of Mannheim