

## Exercise Computer graphics – (till 28. September 2007)


### Ultra-fast line drawing

**Exercise 4:** In the lecture, we got to know the mid-point line-drawing algorithm which can generate a pixel on a line with a single comparison and two or three integer additions per pixel, only.

Alter the algorithm such that points are plotted more sparsely. Therefore, the algorithm's loop should advance by two pixels in the X-direction at a time rather than by one as shown in the lecture. The sketch on the right shows all cases which can emerge.

Hints:

Start with the initialization of the distance-value at  $(x_0+2, y_0+0,5)$  and  $(x_0+2, y_0+1,5)$  and find out the increments in the inner loop, exactly as done in the normal mid-point algorithm. Note that now you have to take more than one distance into account.

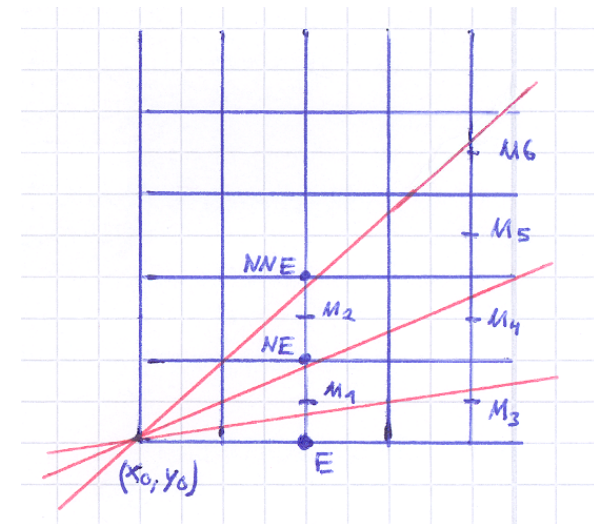

**Exercise 5:** The mid-point algorithm uses integer additions only. Usually, 16 bits are sufficient for representing either x- or y-components. However, modern processors are operating at 32 or even 64 bits at a time. Assuming that an integer has at least 32 bits, we exploit the lower 16 bits only because resolutions of more than  $65535 \times 65535$  pixels are unlikely.

Change the midpoint implementation such that the most significant 16 bits are used as well. Which improvements can you achieve?